



P.S. All tubing and valves are SS 1.5".

| Description | |
|-------------|---|
| 1 | 1 HP PUMP |
| 2 | Ball valve 1.5" |
| 3 | Bag Filter |
| 4 | Catalyzer Model: SMC160F |
| 5 | Manometer with pressure transmitter 4-20 mA |
| 6 | Pump starter(man/off/auto) |

| Caractéristiques du système | |
|-----------------------------|---------|
| Temperature | 250°F |
| Pressure | 150 psi |
| Flow | 63 gpm |

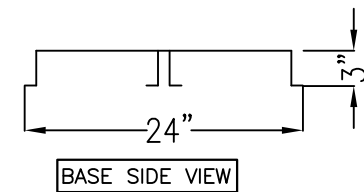

BASE SIDE VIEW

| | | |
|---|----------------------------|----------|
|  1410, Joliot-Curie Boucherville | | |
| DISCIPLINE: CATALYTIC WATER TREATMENT FOR CLOSE LOOP OPERATION | | |
| TITLE: ASS240-600FS100DM | | |
| Drawing by: L.C.Hebert | Design by: L.C.Hebert | Plan No: |
| Date: 21/10/18 | Verified by: L.C.Hebert | #1 |
| Scale: | Project No: | |